
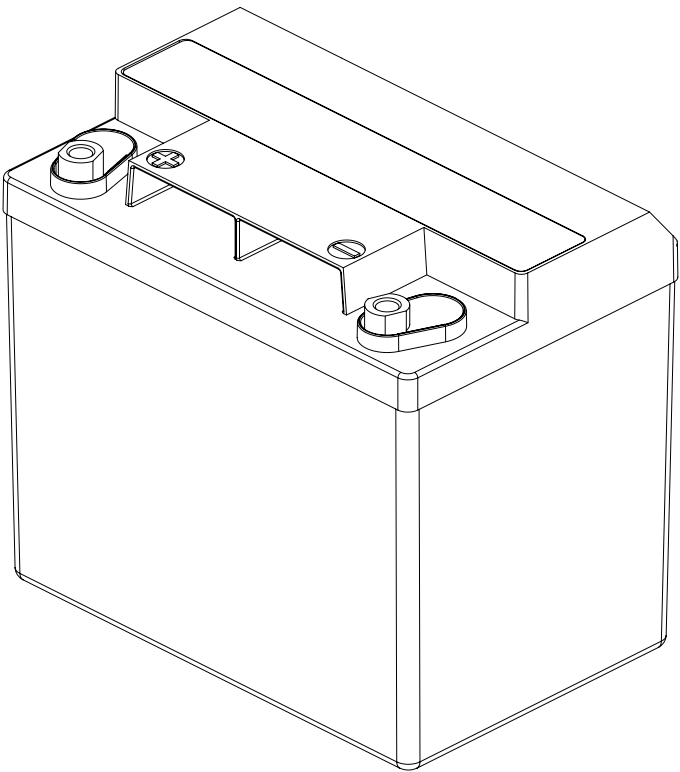
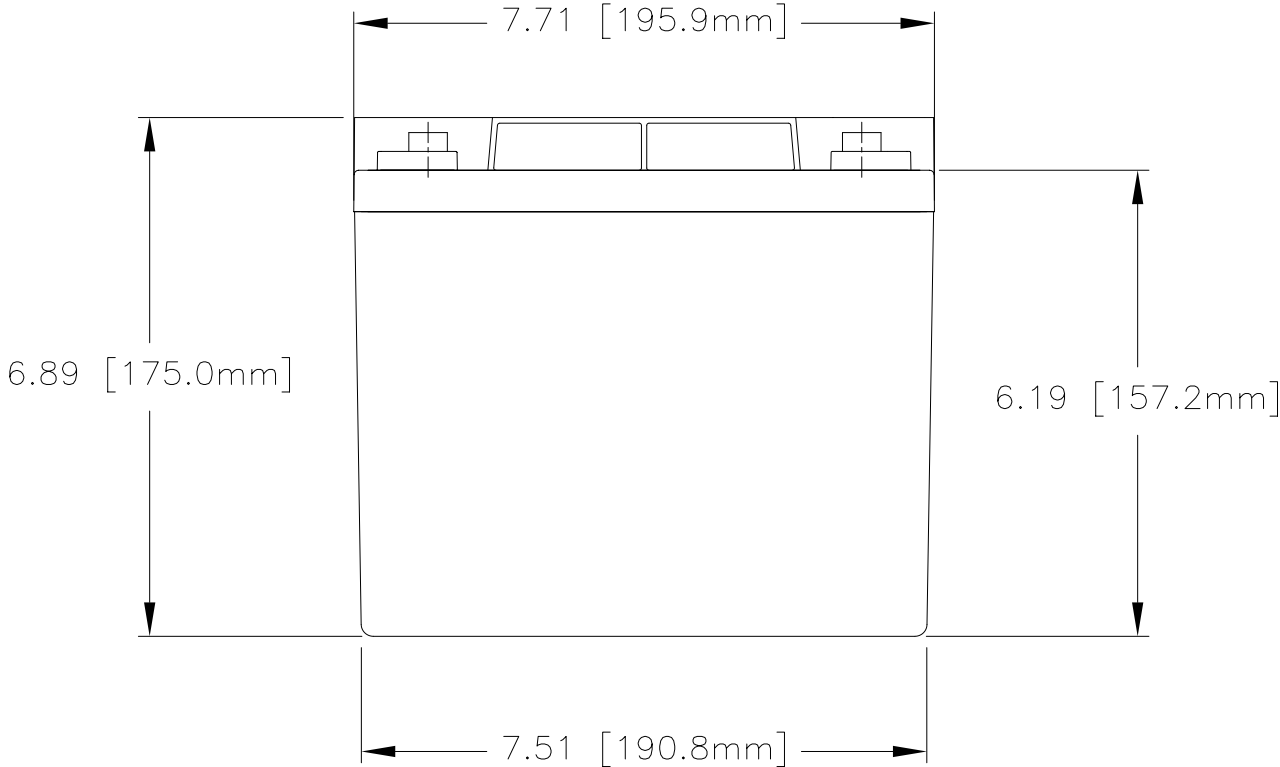


NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00291 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

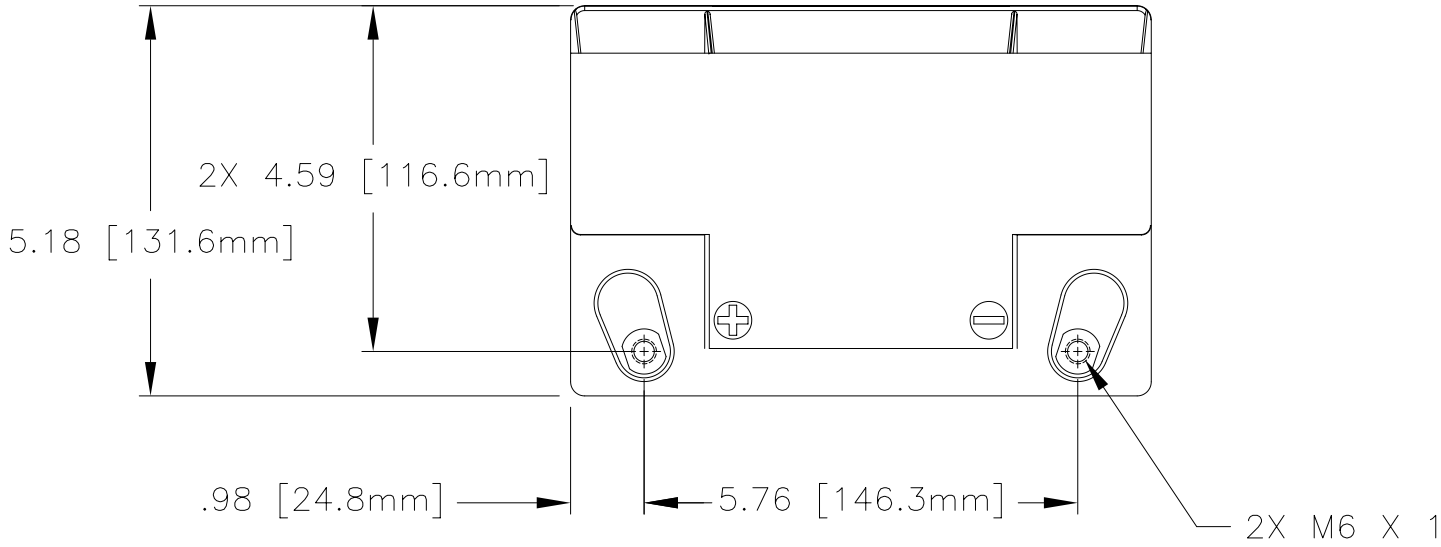

REFERENCE VIEW

CAPACITY RATINGS	
PART NUMBER	PVX-340T
NOMINAL WEIGHT	25 LBS[11.4 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	34 AH

ENVELOPE DRAWING

		CAGE	PART		NOMENCLATURE				MATERIAL		ITEM				
QTY REQD		CODE	IDENTIFYING NO.		OR DESCRIPTION				SPECIFICATION		NO.				
PARTS LIST															
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .030				CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790									
				NA											
				APPROVALS		DATE		TITLE BATTERY, SLA, 12 VOLT, PVX-340T							
				DRAWN	ELH	8/13/01									
				TREATMENT		NONE								CHECKED	HRF
FINISH		NONE		APPROVED	JBT	8/23/01		SIZE	CAGE CODE		DWG NO.		REV		
SIMILAR TO		ACT WT	CALC WT	ISSUED	AT	8/24/01		C	63017		PVX-340T				
								SCALE	NONE		SHEET		1	OF	1